

A **NEW** Pump for Low Flow / High Head Applications in Worldwide Oil & Natural Gas Production

IMO Pump Series LB6D

Increase pump Mean Time Between Repair (MTBR) with:

- ✓ Low Pulse
- ✓ Patented Reversed Hanging Idler Design
- ✓ Proprietary Hardened Rotors
- ✓ Extended-Life Silicon Carbide Mechanical Seal Faces

| API MEDIUM CRUDE OIL APPLICATIONS

 LACT Boosting (Custody Transfer)

 Pipeline Injection

 Transfer Applications

 Truck & Railcar Loading

| NATURAL GAS PROCESSING

 Glycol Dehydration Recirculation


 Amine Treatment Circulation

IMO 3-Screw Pump Series LB6D

 Up to 1450 PSID (100 BAR)

 30-120 GPM (6.8-27.2 m³/h)

 Four model sizes

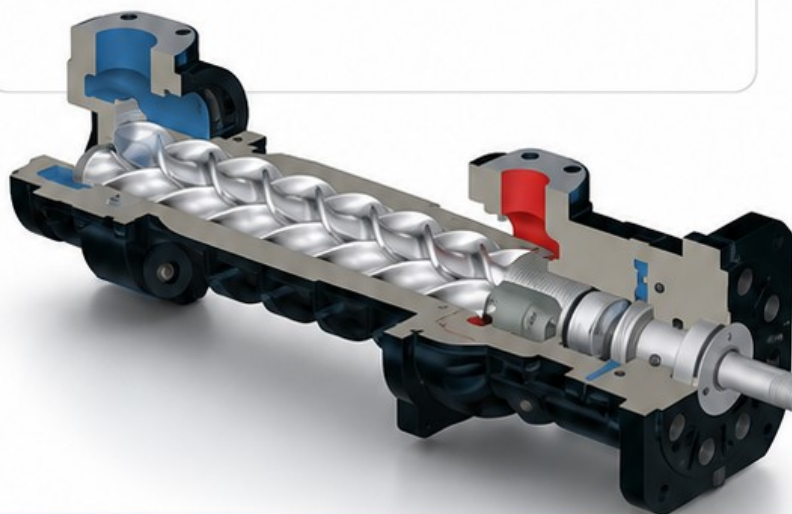

Learn more at circor.com/brands/imo